



**Motor-protective circuit-breaker, 3p, Ir=16-25A, screw connection**




**Part no.** PKZM4-25  
**Catalog No.** 222352  
**Alternate Catalog No.** XTPR025DC1NL  
**EL-Nummer (Norway)** 4355158

**Delivery program**

|  |       |          |   |  |
|--|-------|----------|---|--|
| Product range  |       |          |   | PKZM4 motor protective circuit-breakers up to 65 A   |
| Basic function   |       |          |   | Motor protection   |
|  |       |          |   |  |
| Notes  |       |          |   | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. |
| Connection technique   |       |          |   | Screw terminals  |
| Contact sequence   |       |          |   |  |
| <b>Max. motor rating</b>   |       |          |   |  |
| AC-3   |       |          |   |  |
| 220 V 230 V 240 V  | P     | kW       |   | 5.5  |
| 380 V 400 V 415 V  | P     | kW       |   | 12.5   |
| 440 V  | P     | kW       |   | 12.5   |
| 500 V  | P     | kW       |   | 15   |
| 660 V 690 V  | P     | kW       |   | 22   |
| Rated uninterrupted current  | $I_u$ | A        |   | 25   |
| <b>Setting range</b>   |       |          |   |  |
| Overload releases  |       | $I_r$    | A | 16 - 25  |
| short-circuit release  |       |          |   |  |
| max.   |       | $I_{rm}$ | A | 388  |
| Phase-failure sensitivity  |       |          |   | IEC/EN 60947-4-1, VDE 0660 Part 102  |
| Explosion protection (according to ATEX 94/9/EC)   |       |          |   | PTB 10, ATEX 3012, Ex II(2) G<br>Observe manual MN03402002Z-DE/EN.   |
| <b>Notes</b> Overload trigger: tripping class 10 A<br>Can be snapped on to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height. |       |          |   |  |

**Technical data**

|                     |  |    |  |  |
|---------------------|--|----|--|--|
| <b>General</b>      |  |    |  |  |
| Standards           |  |    |  | IEC/EN 60947, VDE 0660, UL, CSA  |
| Climatic proofing   |  |    |  | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature |  |    |  |  |
| Storage             |  | °C |  | - 40 - 80  |
| Open                |  | °C |  | -25 - +55  |
| Enclosed            |  | °C |  | - 25 - 40  |

|   |  |                 |   |
|---|--|-----------------|---|
| Mounting position   |  |                 |  |
| Direction of incoming supply  |  |                 | as required   |
| Degree of protection  |  |                 |   |
| Device  |  |                 | IP20  |
| Terminations  |  |                 | IP00  |
| Protection against direct contact when actuated from front (EN 50274)     |  |                 | Finger and back-of-hand proof   |
| Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27 |  | g               | 15  |
| Altitude  |  | m               | Max. 2000   |
| Terminal capacity main cable  |  |                 |   |
| Screw terminals   |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x (1 - 50)<br>2 x (1 - 35)  |
| Flexible with ferrule to DIN 46228  |  | mm <sup>2</sup> | 1 x (1 - 35)<br>2 x (1 - 35)  |
| Solid or stranded   |  | AWG             | 14 - 2  |
| Stripping length  |  | mm              | 14  |
| Specified tightening torque for terminal screws                           |  |                 |   |
| Main cable  |  | Nm              | 3.3   |

### Main conducting paths

|   |             |               |                           |
|---|-------------|---------------|---------------------------|
| Rated impulse withstand voltage                         | $U_{imp}$   | V AC          | 6000                      |
| Overvoltage category/pollution degree                   |             |               | III/3                     |
| Rated operational voltage                               | $U_e$       | V AC          | 690                       |
| Rated uninterrupted current = rated operational current | $I_u = I_e$ | A             | 25                        |
| Rated frequency   | f           | Hz            | 40 - 60                   |
| Current heat loss (3 pole at operating temperature)     |             | W             | 14.7                      |
| Lifespan, mechanical                                    | Operations  | $\times 10^6$ | 0.03                      |
| Lifespan, electrical (AC-3 at 400 V)                    |             |               |                           |
| Lifespan, electrical                                    | Operations  | $\times 10^6$ | 0.03                      |
| Max. operating frequency                                |             | Ops/h         | 40                        |
| Short-circuit rating                                    |             |               |                           |
| DC  |             |               |                           |
| Short-circuit rating                                    |             | kA            | 60                        |
| Notes   |             |               | up to 250 V               |
| Motor switching capacity                                |             |               |                           |
| AC-3 (up to 690V)                                       |             | A             | 25                        |
| DC-5 (up to 250V)                                       |             | A             | 25 (3 contacts in series) |

### Trip blocks

|   |  |              |  |
|---|--|--------------|--|
| Temperature compensation                                |  |              |  |
| to IEC/EN 60947, VDE 0660                               |  | °C           | - 5 ... 40                             |
| Operating range   |  | °C           | - 25 ... 55                            |
| Temperature compensation residual error for $T > 40$ °C |  |              | $\leq 0.25$ %/K                        |
| Setting range of overload releases                      |  | $\times I_u$ | 0.6 - 1                                |
| short-circuit release                                   |  |              | Basic device, fixed: $15.5 \times I_u$ |
| Short-circuit release tolerance                         |  |              | $\pm 20$ %                             |
| Phase-failure sensitivity                               |  |              | IEC/EN 60947-4-1, VDE 0660 Part 102    |

### Rating data for approved types

|                      |  |    |     |
|----------------------|--|----|-----|
| Switching capacity   |  |    |     |
| Maximum motor rating |  |    |     |
| Three-phase          |  |    |     |
| 200 V<br>208 V       |  | HP | 5   |
| 230 V<br>240 V       |  | HP | 7.5 |
| 460 V                |  | HP | 15  |

|  |  |      |               |
|--|--|------|---------------|
| 480 V  |  |      |               |
| 575 V<br>600 V                                 |  | HP   | 20            |
| Single-phase                                   |  |      |               |
| 115 V<br>120 V                                 |  | HP   | 2             |
| 230 V<br>240 V                                 |  | HP   | 3             |
| Short Circuit Current Rating, type E           |  | SCCR |               |
| 240 V  |  | kA   | 65            |
| 480 Y / 277 V                                  |  | kA   | 65            |
| 600 Y / 347 V                                  |  | kA   | 25            |
| Accessories required                           |  |      | BK50/3-PKZ4-E |
| Short Circuit Current Rating, group protection |  | SCCR |               |
| 600 V High Fault                               |  |      |               |
| SCCR (fuse)                                    |  | kA   | 42            |
| max. Fuse                                      |  | A    | 600           |
| SCCR (CB)                                      |  | kA   | 42            |
| max. CB  |  | A    | 600           |

## Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 25   |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 4.9  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 14.7   |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 0  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 55   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |            |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |            |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |            |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |            |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |            |    |  |
| 10.9.2 Power-frequency electric strength   |            |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |            |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |            |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 7.0


| Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)  |    |  |
|---|----|--|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss10.0.1-27-37-04-01 [AGZ529016]) |    |  |
| Overload release current setting  | A  | 16 - 25                                  |
| Adjustment range undelayed short-circuit release  | A  | 388 - 388                                |
| With thermal protection   |    | Yes                                      |
| Phase failure sensitive   |    | Yes                                      |
| Switch off technique  |    | Thermomagnetic                           |
| Rated operating voltage   | V  | 690 - 690                                |
| Rated permanent current I <sub>u</sub>  | A  | 25                                       |
| Rated operation power at AC-3, 230 V  | kW | 5.5                                      |
| Rated operation power at AC-3, 400 V  | kW | 12.5                                     |
| Type of electrical connection of main circuit   |    | Screw connection                         |
| Type of control element   |    | Turn button                              |
| Device construction   |    | Built-in device fixed built-in technique |
| With integrated auxiliary switch  |    | No                                       |
| With integrated under voltage release   |    | No                                       |
| Number of poles   |    | 3  |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, AC  | kA | 150                                      |
| Degree of protection (IP)   |    | IP20                                     |
| Height  | mm | 140                                      |
| Width   | mm | 55                                       |
| Depth   | mm | 160                                      |

## Approvals

|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking                 |
| UL File No.                          |  | E36332   |
| UL Category Control No.              |  | NLRV   |
| CSA File No.                         |  | 165628   |
| CSA Class No.                        |  | 3211-05  |
| North America Certification          |  | UL listed, CSA certified   |
| Specially designed for North America |  | No   |
| Suitable for                         |  | Branch circuit: Manual type E if used with terminal, or suitable for group installations |

## Characteristics

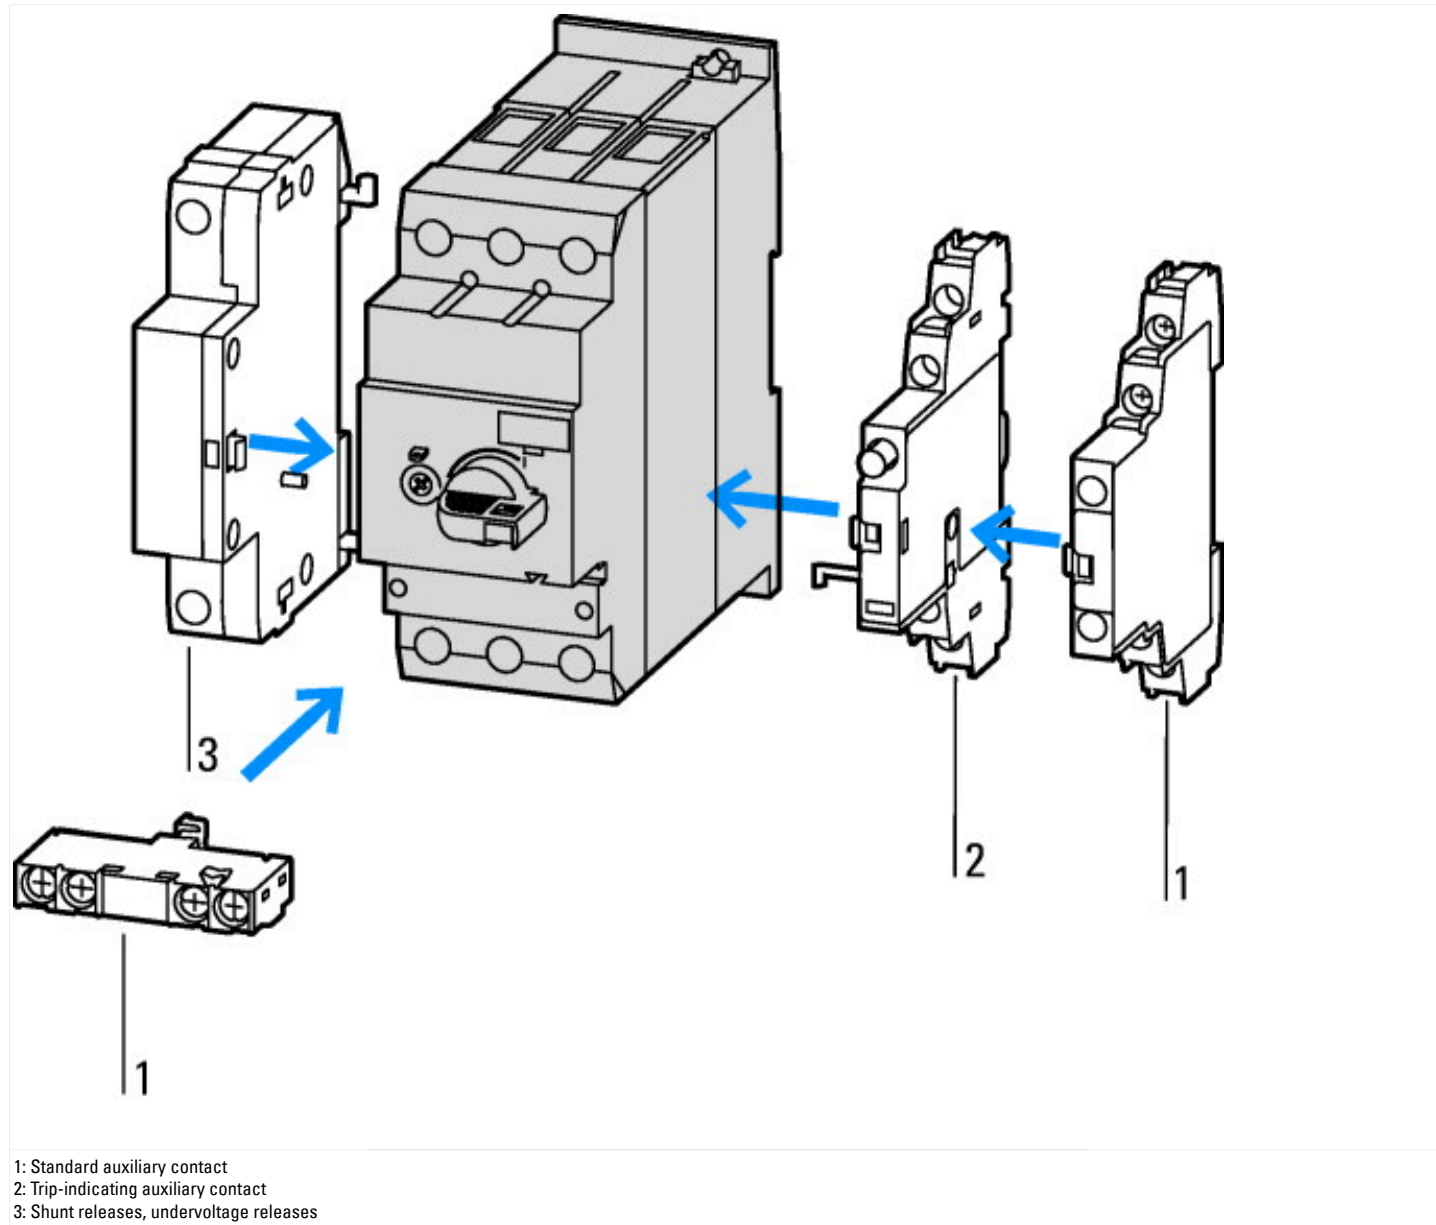

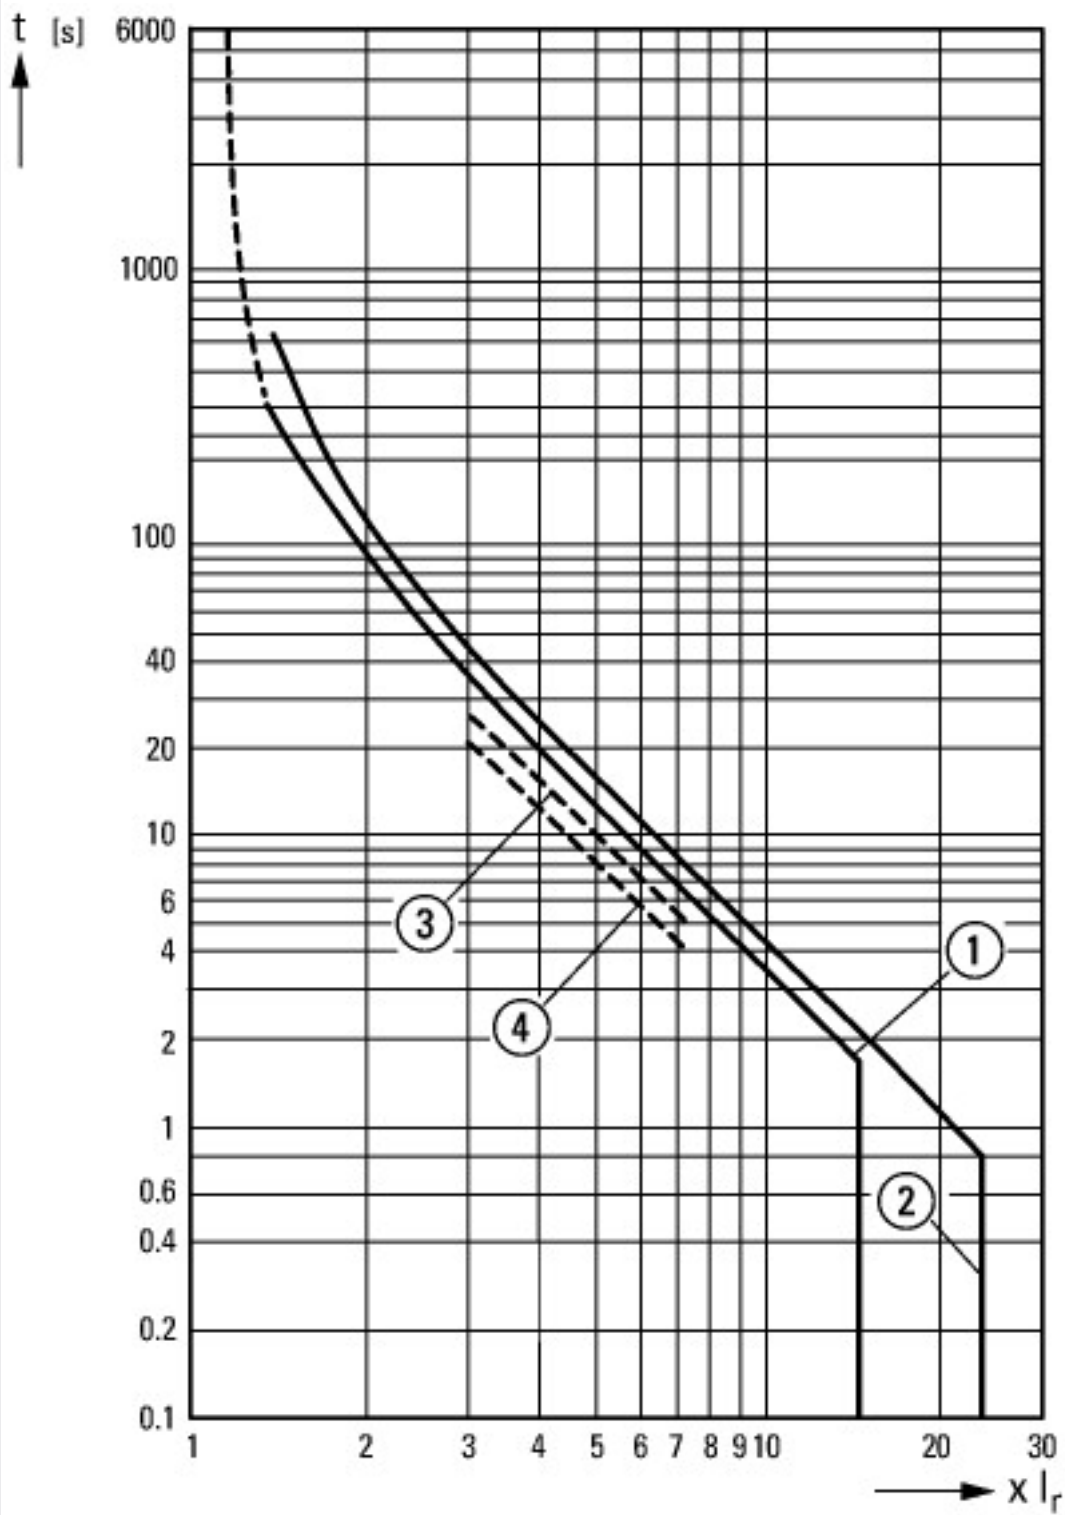

Tripping characteristics motor-protective circuit breaker PKZM4-...

- 1: Minimum level, 3-phase
- 2: Maximum level, 3-phase
- 3: Minimum marker, 2-phase
- 4: Highest marker, 2-phase





Let-through current



① 1 half-cycle  
Let-through energy



## Dimensions

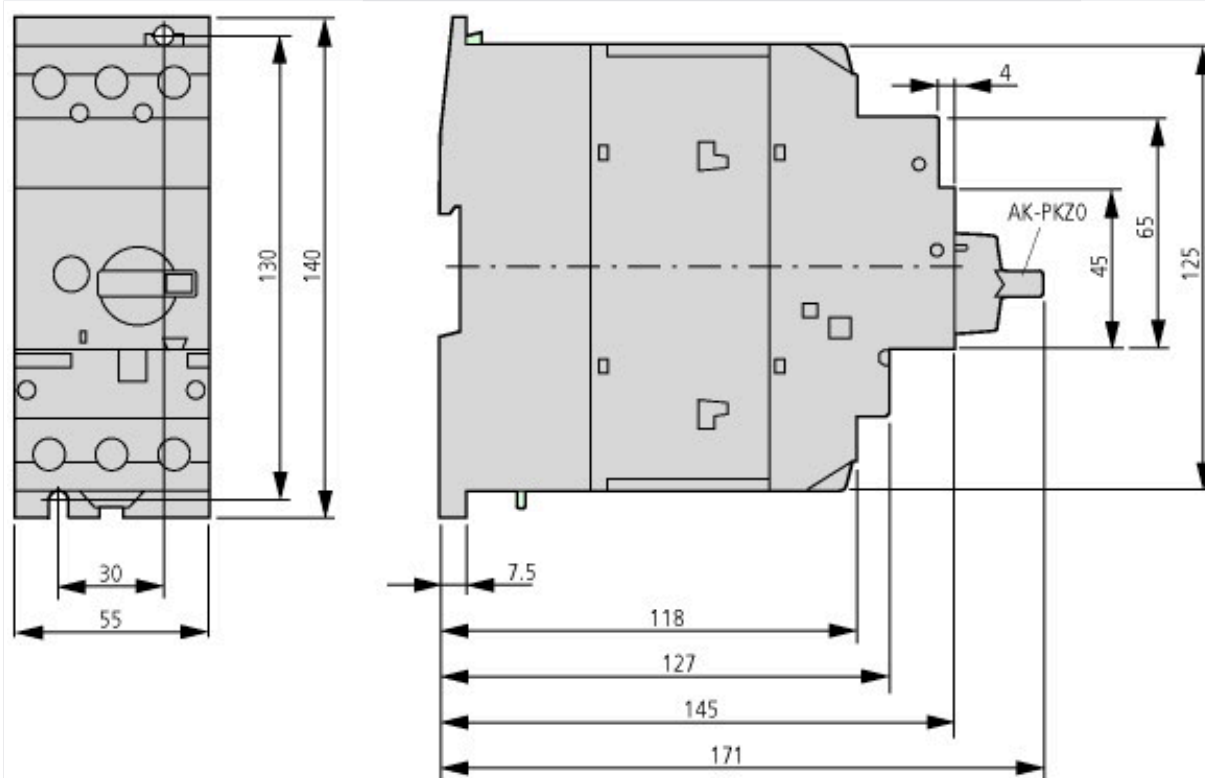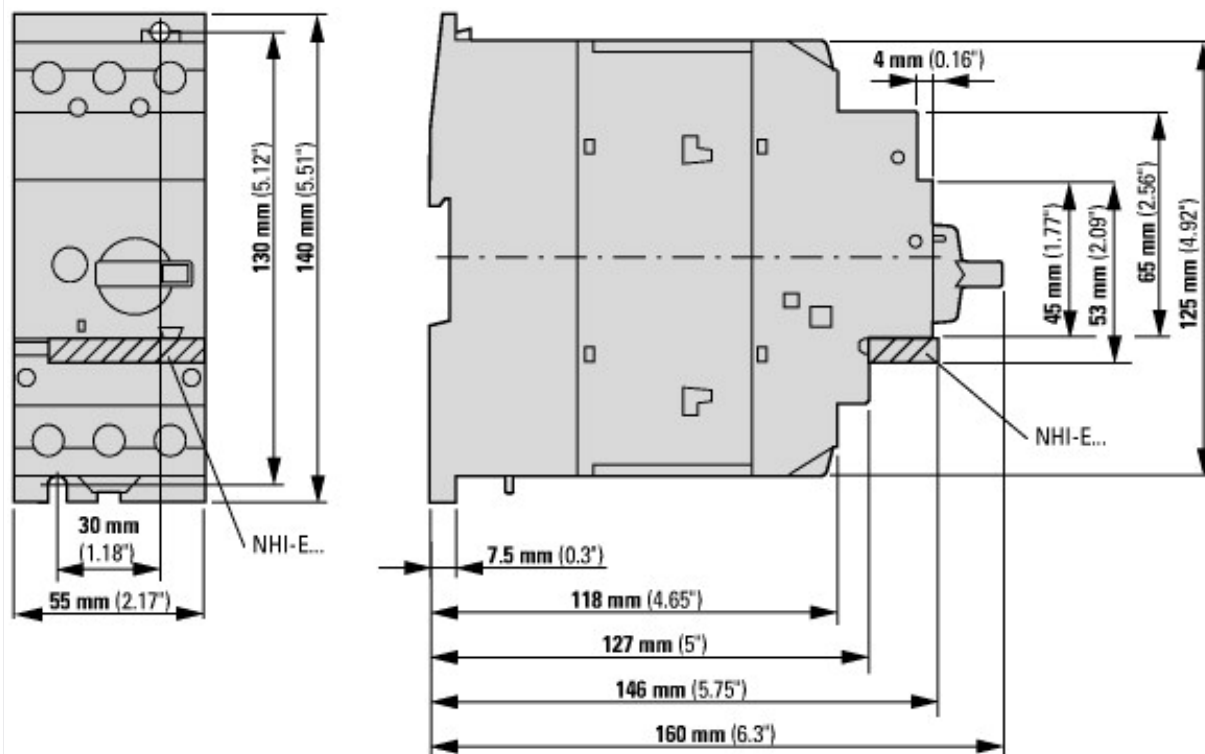

PKZM4-... +AK-PKZ0

## Assets (links)

### Declaration of CE Conformity

00002845

### Instruction Leaflets

IL03407012Z2018\_04

### Manuals

MN03402002Z\_DE\_EN (German)

MN03402002Z\_DE\_EN (English)

## Additional product information (links)

IL03407012Z (AWA1210-1859) Motor-protective circuit-breaker

IL03407012Z (AWA1210-1859) Motor-protective circuit-breaker [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03407012Z2018\\_04.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407012Z2018_04.pdf)

**MN03402002Z (AWB1210-1457) PKZM4 motor-protective circuit-breakers, overload monitoring of Ex e motors**

|  |   |
|--|---|
| MN03402002Z (AWB1210-1457) PKZM4 motor-protective circuit-breakers, overload monitoring of Ex e motors - Deutsch / English | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN03402002Z_DE_EN.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN03402002Z_DE_EN.pdf</a>   |
| switching capacity of the circuit-breakers   | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=7.36">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=7.36</a>   |
| Schaltvermögen   | <a href="https://de.ecat.eaton.com/flip-cat/?edition=MOTCONT1_DE#page_3/45">https://de.ecat.eaton.com/flip-cat/?edition=MOTCONT1_DE#page_3/45</a>   |
| Motor starters and "Special Purpose Ratings" for the North American market   | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels   | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a>   |