
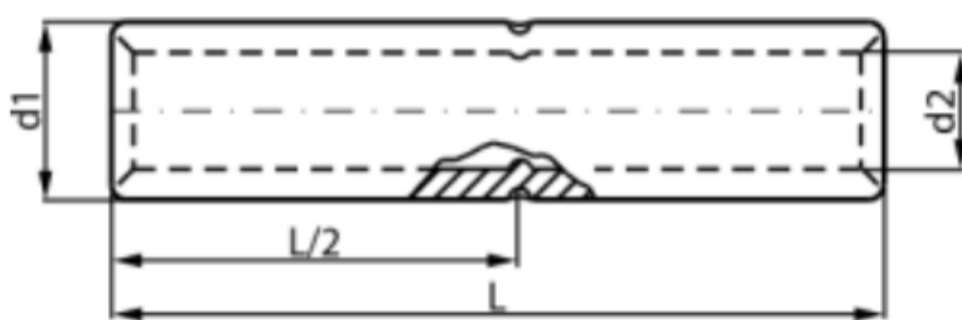


Cu spojne čaure za gnječenje

Izrađene su od elektrolitičkog bakra a površina cinkovana. Koriste se za nastavljjanje bakarnih provodnika istog preseka šestougaoim presovanjem, spoj prema SRPS N.F4.101. Po posebnoj porudžbini izrađujemo visokonaponske Cu-čaure za gnječenje i lemljenje.

Preporučujemo presovanje FEMAN presama.

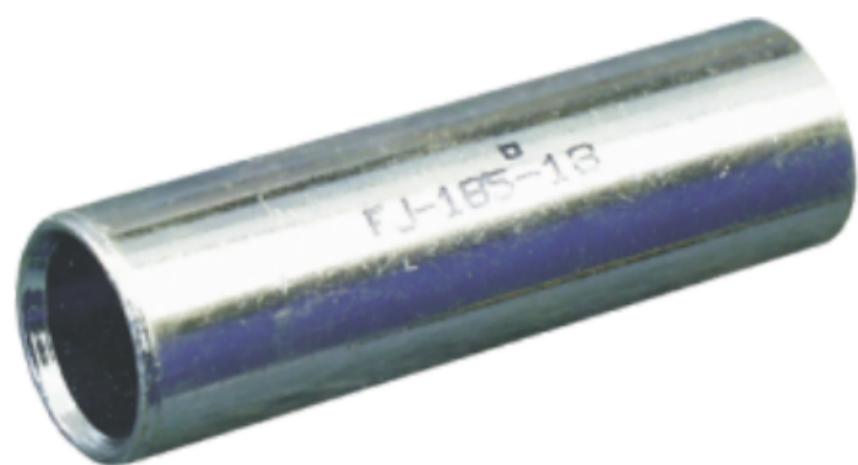

Kodni broj	Oznaka mm ² /Vijak M	d1 mm	d2 mm	L mm	Broj presovanja meh./hidr.	Pakovanje kom	Težina g/100kom
3200006	FSCCU-6	6,5	3,5	26	2-2/-	300	0,35
3200010	FSCCU-10	7,0	4,5	35	2-2/-	200	0,73
3200016	FSCCU-16	8,5	5,5	45	2-2/1-1	200	1,35
3200025	FSCCU-25	10,0	7,0	45	2-2/1-1	200	1,60
3200035	FSCCU-35	12,0	8,5	45	2-2/1-1	300	2,35
3200050	FSCCU-50	14,0	10,0	61	3-3/1-1	200	4,05
3200070	FSCCU-70	16,5	12,0	61	3-3/1-1	100	5,46
3200095	FSCCU-95	18,0	13,5	75	4-4/1-1	100	7,30
3200120	FSCCU-120	19,0	15,0	75	4-4/2-2	150	8,00
3200150	FSCCU-150	21,0	16,5	75	4-4/2-2	100	8,50
3200185	FSCCU-185	24,0	19,0	80	4-4/2-2	50	12,50
3200240	FSCCU-240	26,0	21,0	85	-/2-2	755	14,40
3200300	FSCCU-300	32,0	24,5	124	-/2-2	25	36,72
3200400	FSCCU-400	38,5	27,5	150	-/3-3	15	75,50
3200500	FSCCU-500	42,0	31,0	160	-/3-3	10	89,76
3200600	FSCCU-600	44,0	34,5	160	-/4-4	10	83,40