


# Okaste izolovane kablovske papučice – DIN 46237

Koristi se za završavanje i povezivanje provodnika malih preseka u el.kolu uređaja.

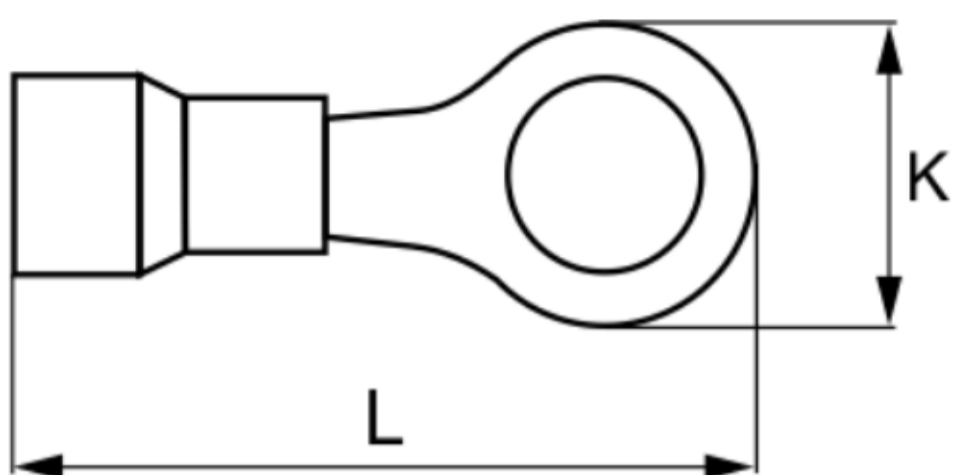

Kodni broj	Oznaka mm <sup>2</sup> /Vijak M	L mm	K mm	Pakovanje kom	Težina g/100kom
1000153	FOP-1,5/3	11,3	5,5	100/2000	52
1000154	FOP-1,5/4	20,5	8,0	100/2000	74
1000155	FOP-1,5/5	20,5	8,0	100/2000	66
1000156	FOP-1,5/6	26,3	11,6	100/1500	102
1000158	FOP-1,5/8	26,3	11,8	100/1500	86
1000253	FOP-2,5/3	21,6	5,5	100/1500	94
1000254	FOP-2,5/4	21,6	8,5	100/1500	78
1000255	FOP-2,5/5	22,2	9,5	100/1500	88
1000256	FOP-2,5/6	27,0	12,0	100/1000	126
1000258	FOP-2,5/8	27,0	12,0	100/1000	98
1000259	FOP-2,5/10	31,0	13,6	100/1000	108
1000464	FOP-6/4	27,0	9,5	100/500	146
1000465	FOP-6/5	27,4	9,5	100/500	176
1000466	FOP-6/6	33,3	12,0	100/500	208
1000468	FOP-6/8	35,0	15,0	100/500	260
1000469	FOP-6/10	35,0	15,0	100/500	224