

New



RoHS compliant

* Protective construction: Flux-resistant type


FEATURES

1. Miniature size and small: 10(W) × 20(L) × 16(H) mm .394(W) × .787(L) × .630(H) inch
2. Compact with high capacity: 1 Form A and 1 Form C, 10 A
3. Ambient temperature: -40°C to +85°C -40°F to 185°F
4. High surge voltage: 8,000 V between contacts and coil
5. High breakdown voltage: 4,000 V between contacts and coil

TYPICAL APPLICATIONS

1. Household appliances
 Air conditioners, Refrigerators, Fan heaters, Microwave ovens, Inverter and Hot water units

ORDERING INFORMATION

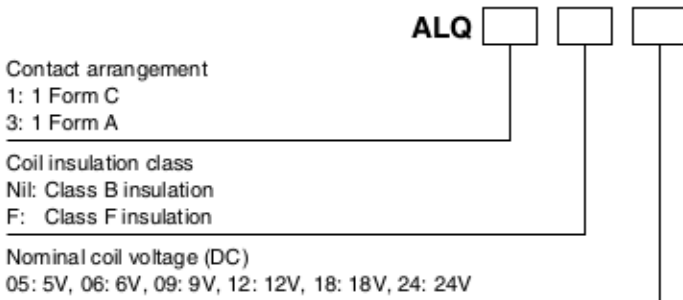

TYPES

Nominal coil voltage	1 Form A	1 Form C
	Part No.	Part No.
5V DC	ALQ305	ALQ105
6V DC	ALQ306	ALQ106
9V DC	ALQ309	ALQ109
12V DC	ALQ312	ALQ112
18V DC	ALQ318	ALQ118
24V DC	ALQ324	ALQ124

Standard packing: Carton 100 pcs., Case 500 pcs.