


Slim, Miniature Relay, Capable of Relaying Programmable Controller and Temperature Controller Outputs

- ROHS compliant.
- Slim and miniature: 17.5 x 6.5 x 12.5 mm (L x W x H).
- Ideal for high-density mounting
- Switches 5 A at 250 VAC/30 VDC.
- Allows 300,000 operations with a 2-A load at 250 VAC or 30 VDC.
- Actual load switching capability equals the G6B's capability.
- Washable construction.

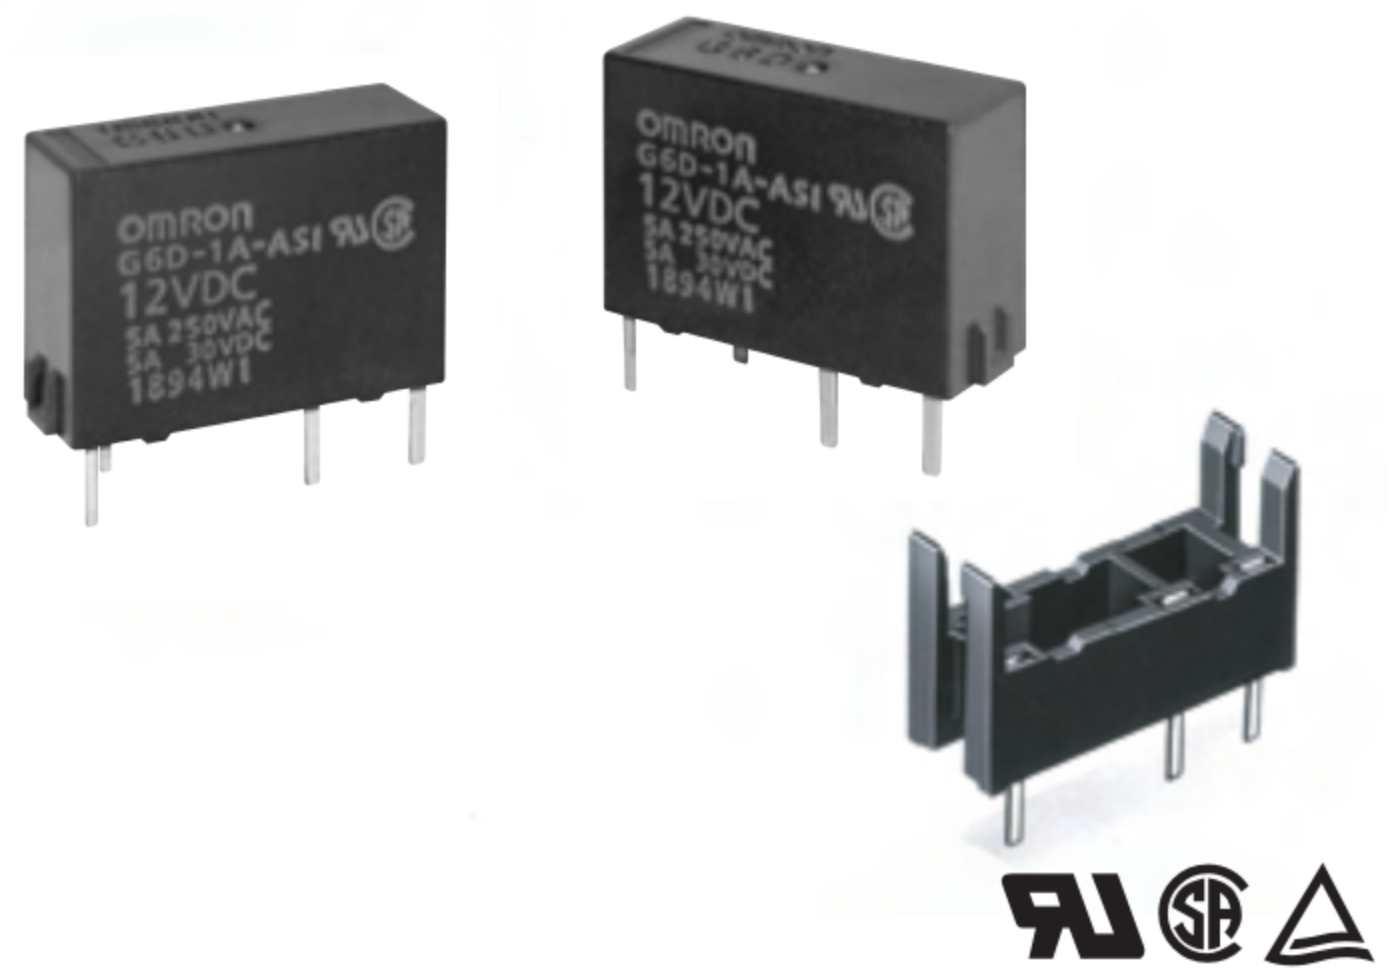

Ordering Information

Classification	Contact form	Enclosure ratings	Model
Standard	SPST-NO	Fully sealed	G6D-1A-ASI

Note: When ordering, add the rated coil voltage to the model number.

Example: G6D-1A-ASI 12 VDC

Rated coil voltage

Model Number Legend

G6D - 1 - A - 12 VDC

- | | |
|--|--|
| 1. Number of Poles
1: 1 pole | 3. Contact Material
ASI: Silver alloy (cadmium-free) |
| 2. Contact Form
A: SPST-NO | 4. Rated Coil Voltage
5, 12, 24 VDC |

■ Accessories (Order Separately)

Connecting Socket	P6D-04P
-------------------	---------