

	kod proizvođača	(W)	boja svetla	(lm)	LED SMD	5m	IPxx	120°	(mm)	
M-F3528-60	4.8W/1m	bela	8~10lm/1LED	SMD LED 2835	60 kom. / 1m	5m	IP20	120	5000 x 8 x 1,5	A++ *
M-F3528-60	4.8W/1m	crvena	8~10lm/1LED	SMD LED 2835	60 kom. / 1m	5m	IP20	120	5000 x 8 x 1,5	A++ *
M-F3528-60	4.8W/1m	plava	8~10lm/1LED	SMD LED 2835	60 kom. / 1m	5m	IP20	120	5000 x 8 x 1,5	A++ *
M-F3528-60	4.8W/1m	zeleni	8~10lm/1LED	SMD LED 2835	60 kom. / 1m	5m	IP20	120	5000 x 8 x 1,5	A++ *
M-F3528-60	4.8W/1m	toplo bela	8~10lm/1LED	SMD LED 2835	60 kom. / 1m	5m	IP20	120	5000 x 8 x 1,5	A++ *
M-S3528-60	4.8W/1m	bela	8~10lm/1LED	SMD LED 2835	60 kom. / 1m	5m	IP67	120	5000 x 11 x 4	A++ *
M-S3528-60	4.8W/1m	toplo bela	8~10lm/1LED	SMD LED 2835	60 kom. / 1m	5m	IP67	120	5000 x 11 x 4	A++ *
M-C3528-60	4.8W/1m	bela	8~10lm/1LED	SMD LED 2835	60 kom. / 1m	5m	IP68	120	5000 x 11 x 4	A++ *
M-C3528-60	4.8W/1m	toplo bela	8~10lm/1LED	SMD LED 2835	60 kom. / 1m	5m	IP68	120	5000 x 11 x 4	A++ *
M-F3528-120	9.6W/1m	bela	8~10lm/1LED	SMD LED 2835	120 kom. / 1m	5m	IP20	120	5000 x 8 x 1,5	A++ *
M-F3528-120	9.6W/1m	toplo bela	8~10lm/1LED	SMD LED 2835	120 kom. / 1m	5m	IP20	120	5000 x 8 x 1,5	A++ *
M-F3528-240	19.2W/1m	bela	8~10lm/1LED	SMD LED 2835	240 kom. / 1m	5m	IP20	120	5000 x 15 x 1,5	A++ *
M-F3528-240	19.2W/1m	toplo bela	8~10lm/1LED	SMD LED 2835	240 kom. / 1m	5m	IP20	120	5000 x 15 x 1,5	A++ *
M-R5050-30	7.2W/1m	bela	10~12lm/1LED	SMD LED 5050	30 kom. / 1m	5m	IP20	120	5000 x 10 x 2,2	A++ *
M-R5050-30	7.2W/1m	RGB - mix	10~12lm/1LED	SMD LED 5050	30 kom. / 1m	5m	IP20	120	5000 x 10 x 2,2	A++ *
M-S5050-30	7.2W/1m	RGB - mix	10~12lm/1LED	SMD LED 5050	30 kom. / 1m	5m	IP67	120	5000 x 12 x 4	A++ *
M-R5050-60	14.4W/1m	bela	10~12lm/1LED	SMD LED 5050	60 kom. / 1m	5m	IP20	120	5000 x 10 x 2,2	A++ *
M-R5050-60	14.4W/1m	toplo bela	10~12lm/1LED	SMD LED 5050	60 kom. / 1m	5m	IP20	120	5000 x 10 x 2,2	A++ *
M-S5050-60	14.4W/1m	bela	10~12lm/1LED	SMD LED 5050	60 kom. / 1m	5m	IP67	120	5000 x 12 x 4	A++ *

- dug radni vek
- minimalna potrošnja


- široka primena
- minimalno sečenje nakon svake 3. LED diode

- sve LED trake reflektuju svetlost pod uglom od 120°
- materijal otporan na koroziju

- samolepljiva traka na poledini
- -25C ~ +60C

Upozorenje:

1. Pre instalacije pažljivo pročitati uputstvo i sačuvati ga.
2. Instalaciju treba da izvrši kvalifikovani električar.
3. Pre instaliranja napajanja/kontrolera isključiti dovod struje.
4. Proveriti kompatibilnost napajanja/kontrolera, u suprotnom LED svetlo neće biti odgovarajuće snage.
5. Pažljivo odabrati mesto postavljanja napajanja/kontrolera i LED trake kako ne bi došlo do oštećenja istih.
6. LED traku seći samo nakon svaka tri (3) SMD LED čipa odnosno na mestima gde je obeleženo za to. Ukoliko se LED traka pogrešno iseče, oštećeni deo ne možete koristiti, treba ga odmah baciti.
7. Mesto postavljanja LED trake treba biti čisto i suvo.
8. LED trake sa IP20 zaštitnom ne smeju se premazivati farbam ili sličnim sredstvima, u suprotnom LED traka će pregoreti.
9. Maksimalno opterećenje (zbir Wati LED traka) ne sme biti više od 80% izlazne snage napajanja.




Instalirati zaštitnu kapicu na kraju.



Montaža:
Izmeriti položaj i razmak postavljanja trake pre sečenja. Odstraniti zaštitnu plastičnu traku i zalepiti na željeno mesto. Povezati kablove od napajanja/kontrolera sa trakom. Uključiti struju.

Primeri - šeme povezivanja:

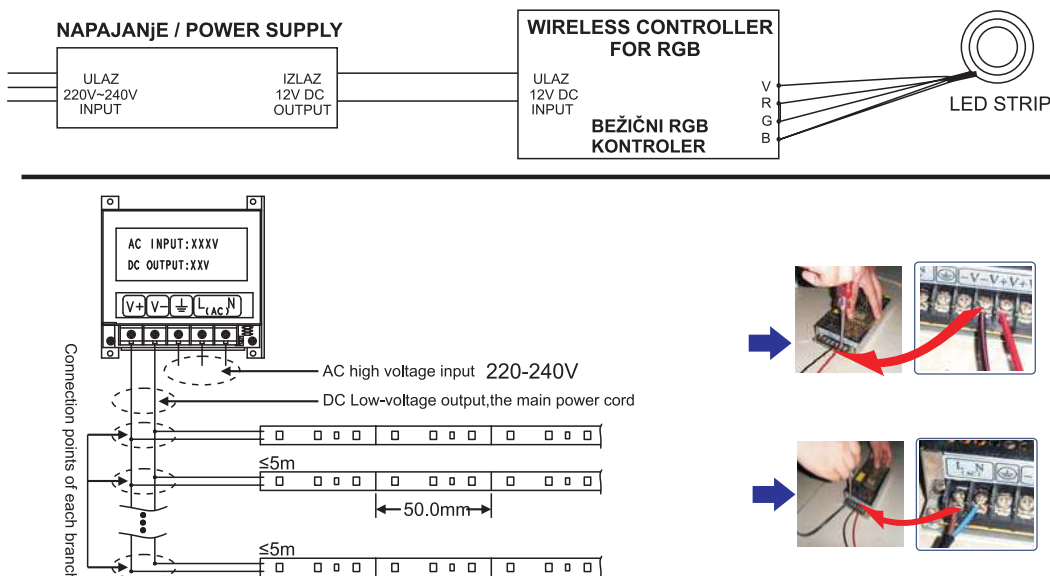


PROTECTION FROM BURNS AND FIRE

Do not operate the LED strip if the ambient temperature (Ta) exceeds 45° C (113° C). Do not modify the LED strip in any way not described in this manual or install than genuine Mitea Lighting parts. Use only accessories approved by Mitea Lighting. If any of the product temperature readouts exceed the level, provide fan assistance to give active cooling to the installation.

Uvoznik za Srbiju:
TRGOVINA MATEJIĆ DOO
Birčaninova br.1
KRUŠEVAC - SRBIJA
tel: +381 37 447 170
e-mail: info@matejic.rs
www.mitealighting.com

Proizvedeno u Kini
Made in China
Произведено во Кина
Proizvedeno na Kitajskem
Proizvođač: S.S.L.T. Co Ltd
for Mitea Lighting

Primer - instalacija LED trake

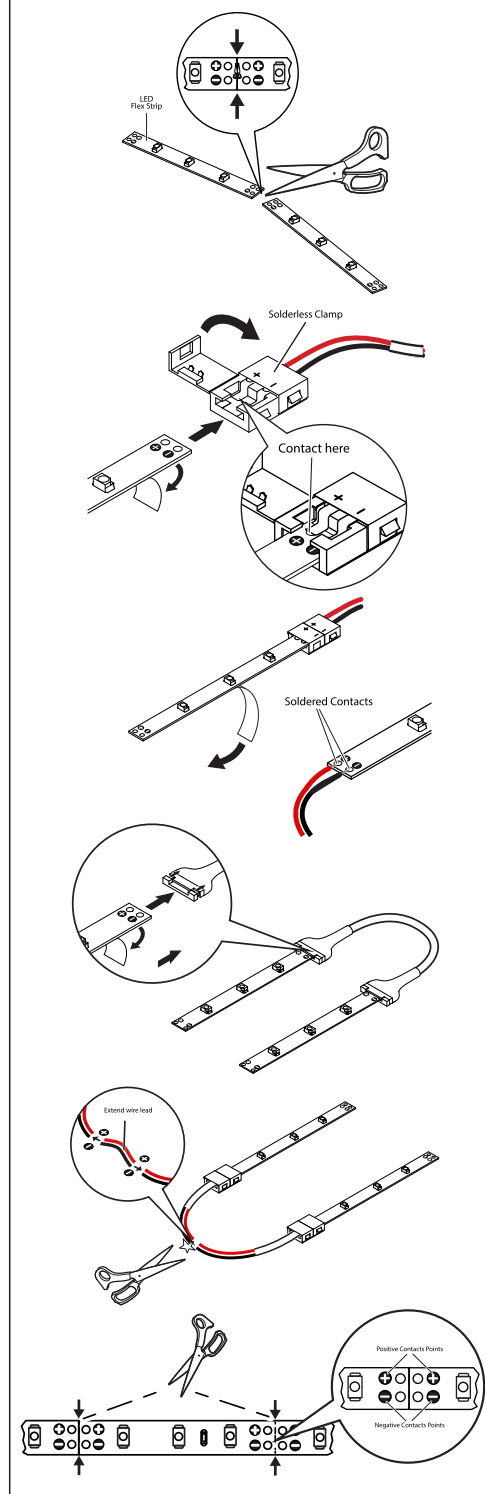

Ova svetiljka sadrži ugrađene LED sijalice.



Sijalice u svetiljci se ne mogu zameniti.



874/2012

GB	This luminaire contains built-in LED lamps. The LED lamps cannot be changed in the luminaire.
PL	W skład oprawy wchodzi wbudowane lampy LED. Nie można wymienić lamp w oprawie.
BIH	Rasvjetno tijelo ima ugrađene LED svjetiljke. Svjetiljke u rasvjetnom tijelu se ne mogu mijenjati
MK	Ovoј svetlosno telo sadrži vgrađene LED svetiljke LED lampи не може да се промени на овој светлосно тело.
SLO	Ta svetilka ima vgrajene LED-sijalke. Sijalk v svetilki ni mogoče zamenjati.
HR	Ovo rasvjetno tijelo sadrži ugrađene LED žarulje. Žarulje u rasvjetnom tijelu ne mogu se zamijeniti.
BG	Това осветително тяло съдържа вградени светодиодни лампи. Лампите в осветителното тяло не могат да бъдат сменяни.
GR	Το φωτιστικό αυτό περιέχει ενσωματωμένους λαμπτήρες LED. Οι λαμπτήρες αυτού του φωτιστικού δεν είναι δυνατόν να αλλαχθούν
TR	Bu armatür dahili LED lambalar içerir. Armatürdeki lambalar değiştirilemez.
RUS	Данный светильник содержит встроенные светодиодные лампы. Смена ламп в этом светильнике не предусмотрена.
HU	A lámpatest beépített LED-lámpákat tartalmaz. A lámpák nem cserélhetők a lámpatestben.
RO	Acest corp de iluminat este prevăzut cu lămpi cu leduri integrate. Lămpile din acest corp de iluminat nu pot fi schimbate.
DEU	Diese Leuchte enthält eingebaute LED-Lampen. Die Lampen können in der Leuchte nicht ausgetauscht werden.

